


ELMWOOD THERMAL CUT-OFFS

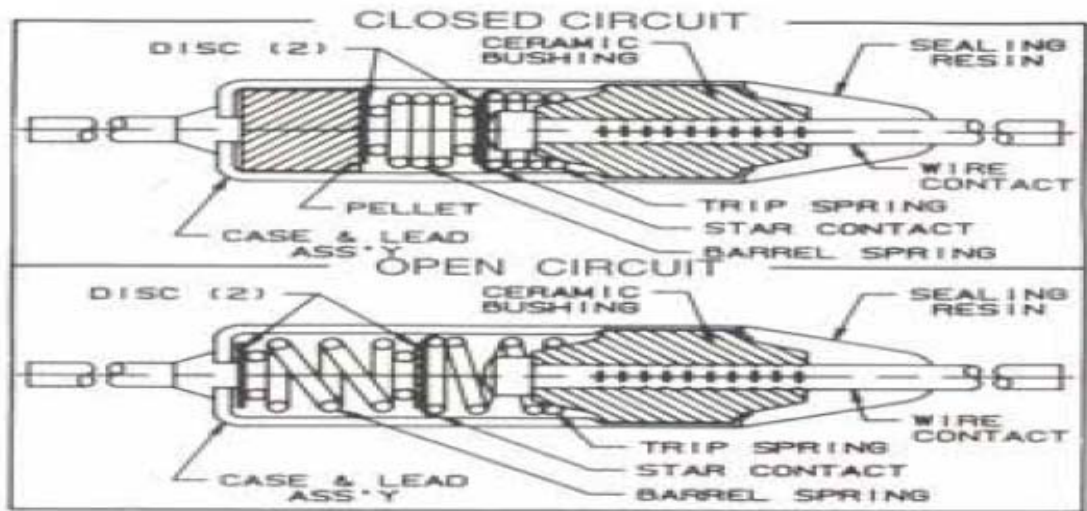

Temperature Ratings Maximum Opening Temperature

TCO Part Number	Temp °C	Temp °F
D070/H070	72	162
D076/H076	77	171
D081/H081	84	183
D088/H088	90	194
D090/H090*	93	199
D098/H098	100	213
D103/H103	104	219
D108/H108	109	228
D115/H115	117	243
D118/H118*	121	250
D125/H125	128	262
D139/H139*	141	286
D142/H142	144	291
D165/H165*	169	336
D181/H181	184	363
D213/H213	216	421
D226/H226*	228	442
D230/H230	230	446
D242/H242*	240	464

ELMWOOD THERMAL CUT-OFFS

Ratings DXXX-HXXX-Serie(s)

PART NO.	T _F °C	T _H °C
D070/H070	72	65
D076/H076	77	67
D081/H081	84	76
D088/H088	90	81
D090/H090	93	85
D098/H098	100	93
D103/H103	104	98
D108/H108	109	103
D115/H115	117	110
D118/H118	121	113
D125/H125	128	119
D139/H139	141	134
D142/H142	144	-
D165/H165	169	162
D181/H181	184	174
D213/H213	216	210
D226/H226	228	212
D230/H230	230	-
D242/H242	240	215

Temp. Tolerance: +0° to -4°C (+0° to -7.2°F)

*Temp. Tolerance: +0° to -6°C (+0° to -10.8°F)

Electrical Rating DXXX

VOLTS	INTERRUPTING	CONTINUOUS
240VAC	25A RES	16.7A RES
120VAC	5 LRA	0.84 FLA
277VAC	20A RES	15A RES
	125VA	
120-277VAC		
	PILOT DUTY	

Electrical Rating DXXXA

VOLTS	INTERRUPTING	CONTINUOUS
120VAC	15A RES	10A RES
240VAC	4.5A RES	3A RES

Electrical Rating DXXXC

VOLTS	INTERRUPTING	CONTINUOUS
277VAC	15A RES	10A RES

T_F=Rated Functioning Temperature

T_H=Holding Temperature

T_M=Maximum Temperature Limit

FOR IEC RATINGS CONSULT FACTORY

Taiwan Golden ENT. CO., LTD.

NO.600, SEC 2. CHINGNIAN RD., FENGSHAN CITY, KAOSHING COUNTY 830, TAIWAN(R.O.C)

Tel: 886-7-767-0299

Fax: 886-7-767-0313

E-mail: jason@twgold.com.tw

Website: www.twgold.com.tw